




CATALOG #:

TYPE:

PROJECT:



## FEATURES

- Ready to ship in 48 hours with on-hand inventory to support immediate job requirements
- Easy to install and service with long-lasting performance
- Fully gasketed fixture is built tough to resist contaminants
- Stainless steel latches provide long-lasting protection against corrosion
- Rigorously tested to withstand water penetration at 1500 PSI with 1.4 GPM flow rate, ensuring reliability in high-pressure washdown scenarios
- Seamless closed-cell gasket, poured and formed in place, creates a vapor-tight seal
- NEMA 4X, IP65, IP66, IP67, and NSF/ANSI Standard 2 – Splash Zone certified
- High-performance up to 134 lm/W
- Made Right Here® in the USA

## ORDERING INFO

CATALOG NUMBER	LENGTH	LUMENS	CRI	CCT	SHIELDING	DRIVER	VOLTAGE	UPC CODE
96-4-L62/840-HIAFR-QS-DIM-UNV	4'	6,200lm	80	4000K	Frosted, ribbed, impact-resistant acrylic	Dimming driver, 0-10V	120-277V	850047638953

## SPECIFICATIONS

- ENCLOSURE** – Outer housing consists of 5VA (f1) fiberglass, rated for flame and weather resistance.
- INTERNAL HOUSING** – .050" aluminum.
- LATCHING** – Stainless steel latches.
- REFLECTOR** – 92% minimum average reflective white polyester powder coat bonded to phosphate-free, multi-stage pretreated metal.
- SHIELDING** – Frosted, ribbed, impact-resistant acrylic.
- ELECTRICAL** – High-quality mid-power LED board. L70 >60,000 hours. -40°C to 40°C max ambient operating temperature. 50/60 Hz constant current driver.
- MOUNTING** – Surface or suspended. Stainless steel ceiling mount brackets included.
- PACKAGING** – One fixture per box, 42 per pallet.
- LISTINGS** –
  - cETLus conforms to UL STD 1598 and UL STD 8750. Certified to CAN/CSA STD C22.2 No. 250.0. Suitable for wet locations.
  - NSF/ANSI Standard 2–Splash Zone certified, IP65, IP66, and IP67 certified, and rated for NEMA 4X.
  - Pressure wash rated to 1500 PSI.
  - RoHS compliant.
  - Build America, Buy America (BABA) and Buy American Act (BAA) compliant. Request certification at [hew.com/buy-american](http://hew.com/buy-american)
- WARRANTY** – 5-year limited warranty, see [hew.com/warranty](http://hew.com/warranty)






## FIXTURE PERFORMANCE DATA

CATALOG NUMBER	CCT	DELIVERED LUMENS	WATTAGE	EFFICACY (lm/W)
96-4-L62/840-HIAFR-QS-DIM-UNV	4000K	6434	48	134


- Photometrics tested in accordance with IESNA LM-79. Results based on 80 CRI/4000K CCT, wattage for 120V input, and 25°C ambient temperature. Actual performance may vary +/-5%.
- To calculate lumen output in emergency mode, multiply the battery wattage by the efficacy.

## DISTRIBUTION CURVE



## DIMENSIONS

### BACK VIEW

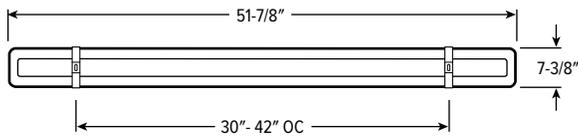

### MOUNTING BRACKET

